




LPS Series-Solar Power

LPS12-230

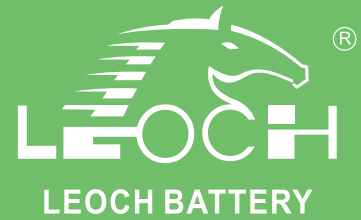


Specifications

Rated Voltage	12V	
Nominal Capacity	230Ah	(C ₁₀₀ , 1.80V/cell)
Dimension	Length	522mm (20.55 inches)
	Width	240mm (9.45 inches)
	Container Height	218mm (8.58 inches)
	Total Height	224mm (8.81 inches)
Approx Weight	64.0 Kg (141.1 lbs)	
Terminal	M8	
Container Material	ABS	
Rated Capacity (25°C)	210.0 Ah	(20hr, 10.5A, 1.80V/cell)
	200.0 Ah	(10hr, 20.0A, 1.80V/cell)
	174.5 Ah	(5hr, 34.9A, 1.75V/cell)
	121.5 Ah	(1hr, 121.5A, 1.60V/cell)
Max. Discharge Current	2000A (5s)	
Internal Resistance(25°C)	Approx. 2.7mΩ	
Operating Temp. Range	Discharge	-20°C~55°C (-4°F~131°F)
	Charge	0°C~40°C (32°F~104°F)
	Storage	-15°C~50°C (5°F~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max. Charging Current(25°C)	57.5A	
Charge voltage(25°C)	Float	13.5V
	Temp. Coefficient	-3mV/cell/°C
	Cycle(Equalization)	14.4~15.0V
Effect of temp. to Capacity	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3% per month at 25°C	



Layout

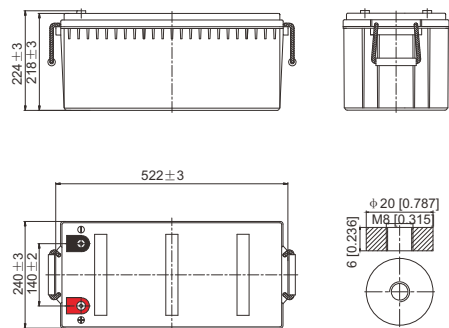

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	15 min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h	48h	100h
1.85V/cell	227.5	189.0	146.8	116.3	94.1	61.3	46.3	37.9	32.0	22.4	19.2	10.2	4.58	2.25
1.80V/cell	252.2	207.9	158.4	123.5	99.2	65.2	48.8	39.7	33.6	23.5	20.0	10.5	4.65	2.30
1.75V/cell	279.8	227.7	170.4	132.0	107.0	68.3	51.5	41.5	34.9	24.2	20.4	10.7	4.73	2.32
1.70V/cell	305.7	248.7	187.2	137.9	113.0	72.0	54.0	43.2	36.3	25.1	21.1	10.9	4.78	2.35
1.65V/cell	323.7	262.5	197.2	146.4	116.9	74.5	56.0	44.7	37.6	25.7	21.5	11.2	4.87	2.39
1.60V/cell	354.8	285.0	209.6	151.7	121.5	77.6	57.9	46.1	38.9	26.4	22.0	11.5	4.95	2.41


Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	15 min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h	48h	100h
1.85V/cell	426.8	358.2	281.3	224.7	183.0	119.7	90.6	74.4	63.1	44.4	38.1	20.3	9.16	4.51
1.80V/cell	466.8	388.2	298.9	235.7	191.3	126.4	95.0	77.6	65.9	46.4	39.7	20.9	9.28	4.59
1.75V/cell	511.5	421.2	318.9	250.7	205.4	131.9	100.0	80.8	68.2	47.7	40.5	21.3	9.41	4.62
1.70V/cell	551.1	456.6	348.4	260.8	216.2	138.7	104.6	84.1	70.9	49.5	41.8	21.7	9.51	4.68
1.65V/cell	581.4	480.1	365.5	275.7	222.9	143.1	108.2	86.8	73.2	50.7	42.7	22.2	9.67	4.74
1.60V/cell	624.3	513.7	384.2	283.0	229.6	147.9	111.1	89.1	75.4	51.9	43.5	22.7	9.83	4.78



LPS Series-Solar Power

LPS12-230

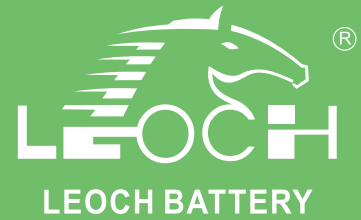

Applications

- Renewable Energy Storage Systems
- SOS pillars
- Street lighting
- Railway crossing
- Solar power stations
- Emergency lighting
- Measurement stations
- Survey and Mapping system


General Features

- Increased cyclic life suitable for renewable energy storage applications
- Using oxygen recombination technology: maintenance-free
- Low acid density and special plate design for increased lifetime and tolerance for irregular charging and discharging patterns of renewable energy applications
- Unique plate group configuration and high quality AGM separator offer increased operational life
- Special vent valve design with flame arrestor to ensure high safety standards
- ABS case with increased structural strength (UL94-V0 flame retardant case is available optionally upon request)


Standards

- Tested according to international standard IEC 60896-21 and compliant to defined requirements of IEC 60896 certified
- Classified as "Very Long Life" according to Eurobat
- UL certified
- Approved as non-hazardous cargo for ground, sea and air transportation in accordance with ICAO, IATA and IMDG
- Manufactured in Leoch® Ts16949, ISO 9001, ISO 14001 and OHSAS 18001 certified production facilities


Discharge Characteristics

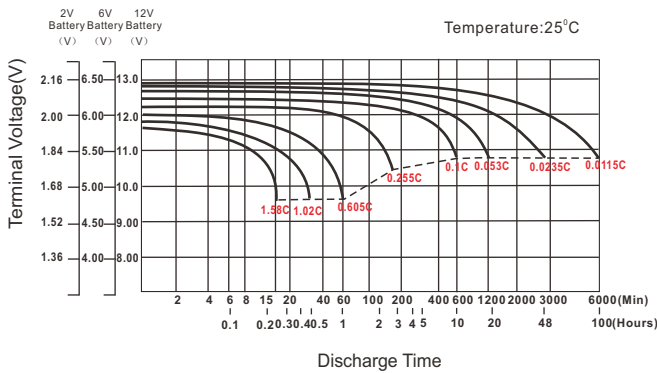


Temperature Effects in Relation to Battery Capacity

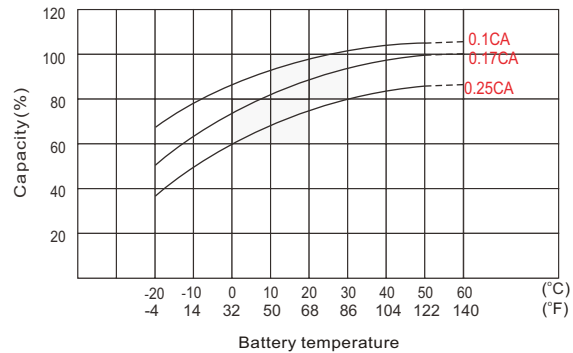

Cycle Life in Relation to DOD

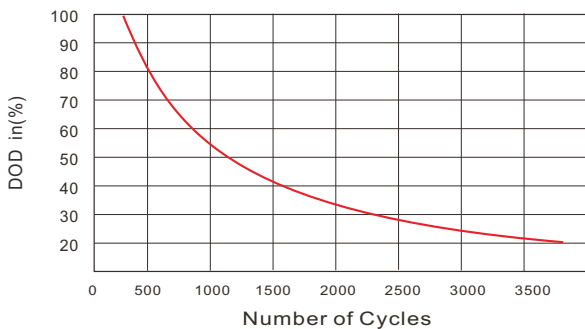

Self Discharge Characteristics

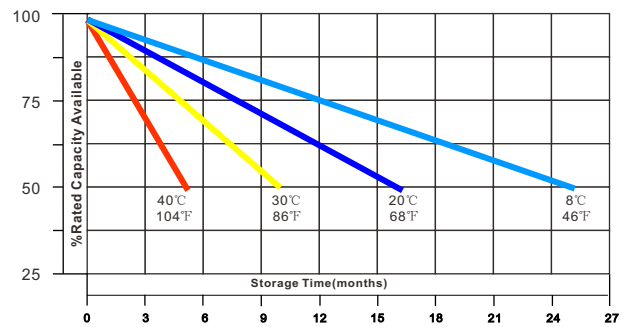

Sales Offices Worldwide

China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-755-86036060 (100 lines)
Fax: +86-755-26067269
E-mail: export@leoch.com

HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,
Tsuen Wan, New Territories, Hong Kong
Tel: +852 35786666
Fax: +44 1452 690125
E-mail: sales.hk@leoch.com

Singapore Sales Office

No. 1 Tech Park Crescent,
Singapore 638131
Tel: +65 68636078
Fax: +65 6863 6079
Email: sales.sg@Leoch.com

Australia Sales Office

2/29 Tarlington Place, Smithfield. NSW 2164
Australia
Tel: 02 9756 0950
E-mail: sales.au@leoch.com

North America Sales Office

19751 Descartes
Foothill Ranch, CA 92610, USA
Tel: 949-588-5853
Fax: 949-588-5966
E-mail: sales@leoch.us

UK Sales Office

9B Wheatstone Court. Waterwells, Business Park,
Gloucester, GL2-2AQ, UK United Kingdom
Tel: +44(0) 1452 729428 / 1452 729696
Fax: +44 1452 690125
E-mail: Sales.Europe@leoch.com

EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,
Greece
Tel: +30 210 5760318 (2 lines)
E-mail: support_EMEA@leoch.com

India Sales Office

Shed no.A-53(b), 2nd Stage of Peenya Industrial Area,
Bangalore North Taluk, Bangalore-560058, India
Tel: +91-80-23440018/23440019
Fax: +91-80-23440017
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)
[Http://www.leoch.us](http://www.leoch.us)

© 2018 LEOCH. All rights reserved.
Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
Subject to revisions without prior notice.

Publication No.:LB-LPS12-230-PD-EN-V1.0-201811